



ODC FIXED ROOFLIGHT

THE DEFINITIVE FIXED FLAT ROOFLIGHT THAT COMBINES
OUTSTANDING THERMAL PERFORMANCE, ROBUST ALUMINIUM
STRUCTURE WITH SLEEK AESTHETIC APPEAL.

The ODC Fixed Rooflight is a traditional roof window that offers a classic solution to improving levels of natural daylight into living spaces in a range of standard and bespoke shapes and sizes. We can supply single panel to huge multi panel roof windows to suit your requirements.

ODC Door & Glass Systems Ltd.

EMAIL: sales@odcglass.co.uk www.odcglass.co.uk

CLARITY IN DESIGN



SLIDING DOORS



FOLDING DOORS



WINDOWS



ROOFS & ROOFLIGHTS



GLASS STRUCTURES



DOORS

ODC FIXED ROOFLIGHT



DESIGN FEATURES

Manufactured from our extruded aluminium profile which is thermally broken with two polyamide insulating sections. Factory glazed with a double glazed argon filled and soft coat low E insulating glass unit for unrivalled U-Values as low as 0.5 centre pane.

All ODC Fixed Rooflights are manufactured to your specific requirements as both a standalone single or multi-pane unit. Also, a range of wall abutting options are available.

GLASS OPTIONS

We supply all of our rooflights glazed with a high specification insulating glass unit, as standard, there are many additional options including: triple glazed, tinted glass, sound insulating, high performing solar control, laminated, self cleaning and obscured.

UPSTAND

These rooflights are designed to be installed on a 150mm upstand provided by the builder and can range from a 5° to 45° pitch.

KEY FEATURES

- Site fitting as standard
- Borders cut to required size for a sleeker finish
- Glazed on site with Argon gas filled solar control glass as standard
- Double glazed units have a centre pane U-value from 1.0 W/m²K
- Triple Glazed units have a centre pane U value from 0.5 W/m²K
- Thermal broken aluminium, triple seal colour-coded gasket system
- Manufactured Standards (BS EN-12150 & BS EN-1279)


UNRIVALLED PERFORMANCE

- Weathertightness in accordance with BS 6375-1:2015
- Air Permeability test in accordance with BS EN 1026:2000
- Watertightness test in accordance with BS EN 1027:2000
- Resistance to wind load in accordance with BS EN 12211:2000

POLYESTER POWDER COATING

Our frames are supplied dual colour as standard: RAL9010 (white) internally and Jet Black (RAL 9005m) or RAL7015 (slate grey) externally, but we can supply a rooflight to any standard RAL colour, if the project requires.

TECHNICAL ASSISTANCE IS AVAILABLE TO ASSIST YOU IN THE SIZING AND SPECIFICATION OF THE ODC FIXED ROOFLIGHT.

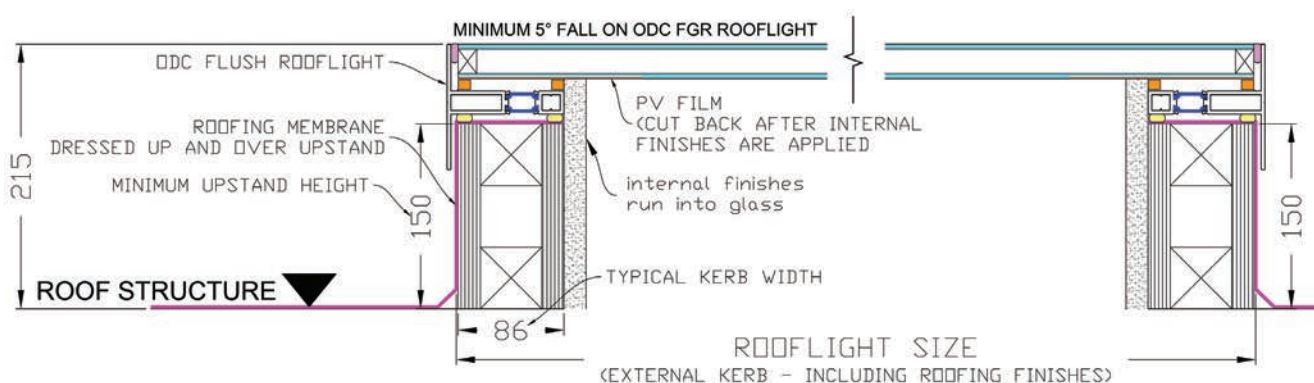

FOR MORE EXAMPLES OF OUR WORK VISIT WWW.ODCGLASS.CO.UK OR VISIT OUR SHOWROOMS:

LONDON: 97 Bollo Lane, London W3 8BN

POOLE: Sterte Road Industrial Estate, 145 Sterte Road, Poole, Dorset BH15 2AF

SALES: 03300 586 792 **CUSTOMER SERVICES:** 03300 586 793

CLARITY IN DESIGN

